


CARBON STEEL OR STAINLESS STEEL SWING CHECK VALVE NUT COVER DESIGN

DESIGN DESCRIPTION:

- Design: Factory STD;
- Manufacture: Factory STD;
- Pressure-Temperature Ratings: ANSI B16.34
- Threaded: NPT, BSP/BSPT, DIN STD;
- Test: API598, DIN3230;
- Y-Type, Threaded Cap,
- Investment Casting Body
- Metal seal; 800WOG;
- Option: Handwheel
- Material and Working Temp.:
 - ◆ A216 WCB: -29 °C~425 °C (6 °F-822 °F)
 - ◆ A351-CF8/CF8M: -40 °C~550 °C (15 °F-1047 °F)

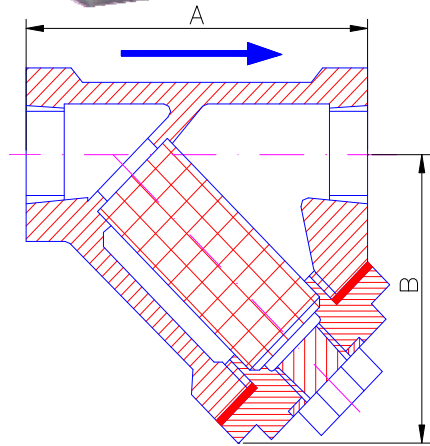

PARTS AND MATERIAL:

PARTS NAME	MATERIALS
Blow Off Plug	A216-WCB/A351-CF8/CF8M/CF3/CF3M
Cover	A216-WCB/A351-CF8/CF8M/CF3/CF3M
Gasket	PTFE
Screens	SS 316 OR SS 304
Body	A216-WCB/A351-CF8/CF8M/CF3/CF3M

OTHER MATERIALS ARE AVAILABLE UPON REQUEST.

DIMENSIONS LIST(UNIT:MM):

DN	G	L	H	B	E
6	1/4"	63.5	42	24	11.5
10	3/8"	64	42	24	13
15	1/2"	65	43	26	14
20	3/4"	80	50	32	15
25	1"	89	60	41	17
32	1-1/4"	107	64	49	20
40	1-1/2"	118	70	56	20
50	2"	140	88	69	22

Remark: Our design can be suitable for all standard (BS, DIN, ANSI, JIS standard etc.)

✧ We hereby reserve the rights of any alternative dimension that would help to improve our valve's quality and working efficiency.